



Photocell Sensor 304



Welcome to use 304 light control sensor!

The product can turn on or turn off light automatically according to ambient-light. Ambient temperature and humidity can't affect it. It is not only convenient but also practical; it can control the load working only at night. It is used for road light, garden light etc.

SPECIFICATION:

Power source: 220V-240V/AC

Rated Current: 20A

Working Temperature: -20~+40°C

Power Frequency: 50Hz


Ambient Light: <2-100LUX (adjustable)

Working Humidity: <93%RH

INSTALLATION:

- Switch off the power.
- The product should be installed in a trough.
- Pull the plastic button at the back of the product, and then put the product into the trough. After that, push the plastic button to lock the product in the trough.
- Connect the wire with the product as per the Connection-wire diagram

CONNECTION-WIRE DIAGRAM:

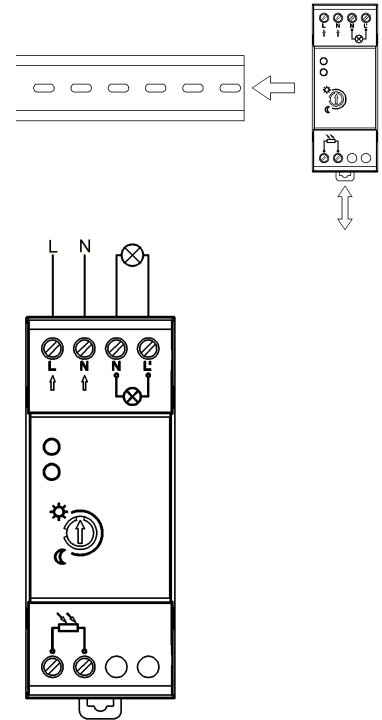

TEST:

- Switch on the power.
- Please use enclosed black opaque bag in the packing when you test in daytime.
- When the bag mantles the detection window of the photocell, the ambient light of the photocell is dark, the lamp will be on.
- When you take off this bag, the lamp will be off automatically.

NOTE:

- In front of the photocell, it should be no obstruction affecting to accept natural light;
- In front of the photocell, it should be no swaying object.